
Time–current **curve**

Virtual pre-arcing time (s) against r.m.s. prospective current (A), for every rating from 40 A to 630 A.

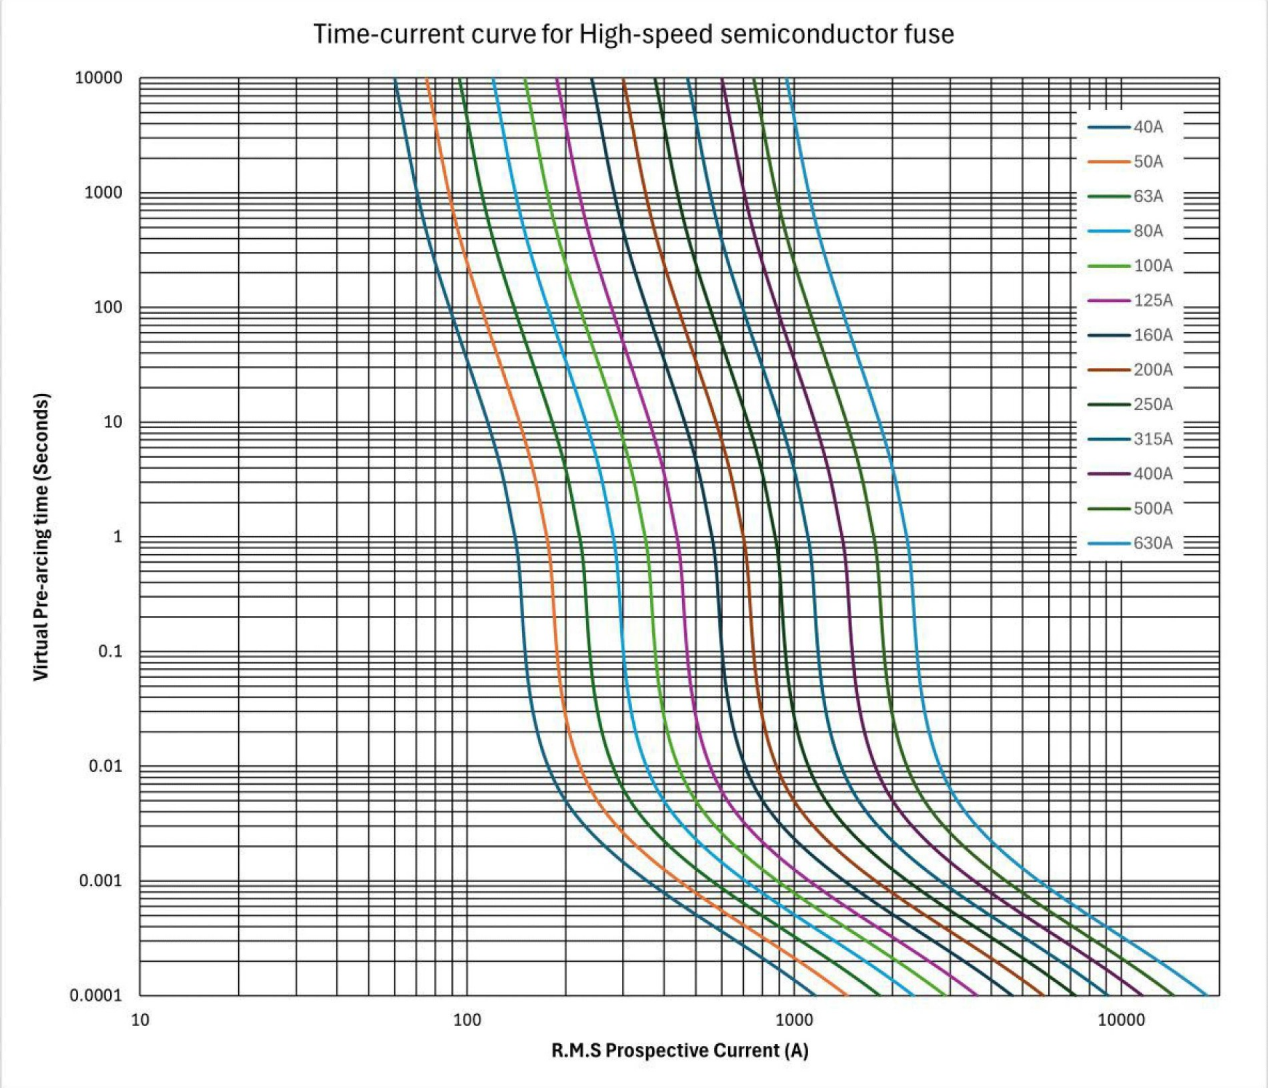

RATINGS	SIZES	CLASS
13 · 40 – 630 A	**NH00 · NH1 · NH2 · NH3**	**gR · 690 V AC**

Sizes & ratings

RATED VOLTAGE	BREAKING CAPACITY	CLASS	STANDARD
690 V AC	120 kA	gR	IEC 60269-4



FUSE LINK SIZE

NH00

40 – 160 A

40A 50A 63A 80A 100A 125A 160A



FUSE LINK SIZE

NH1

63 – 250 A

63A 80A 100A 125A 160A 200A 250A



FUSE LINK SIZE

NH2

200 – 400 A

200A 250A 315A 400A



FUSE LINK SIZE

NH3


315 – 630 A

315A 400A 500A 630A


Overall **dimensions**

All dimensions in mm.

NH00

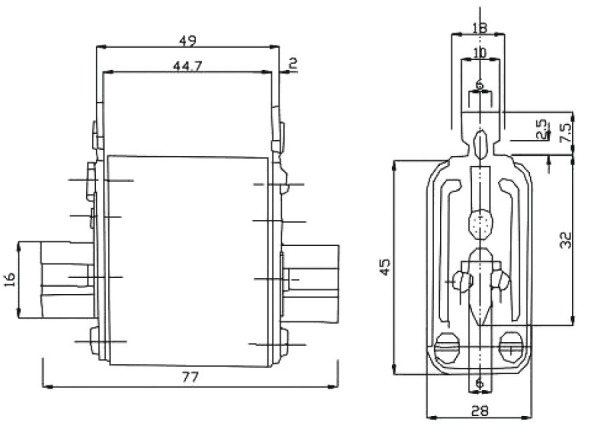

NH 1 · 2 · 3

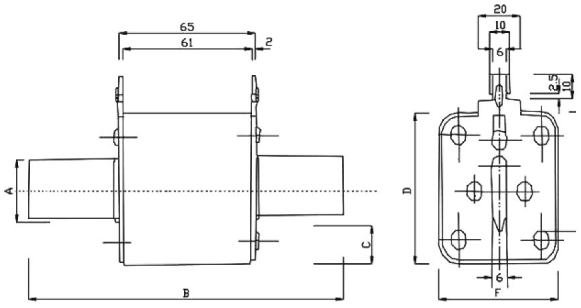

NH 1 · 2 · 3 — DIMENSIONS A–F (MM) AND WEIGHT

Type	A	B	C	D	E	F	Weight (kg)
Size 1	20	135	12	48	38	48	**0.390**
Size 2	25	147.5	14	58	45	58	**0.570**
Size 3	32	147.5	17	66	50	66	**0.760**